

Molice! INR-21700-P45B

4.5Ah Power cell

Characteristics

Confidential



Introduction



MOLICEL® INR-21700-P45B 4.5Ah power cell

Cell is capable of continuous cycling at high rates up to 45A

Key Characteristics:

- Low cell impedance: <15mOhm DCR at 10s
- 3C (13.5A) charge capability
- -40°C discharge capability



Product Data Sheet




PRODUCT DATA SHEET
MODEL **INR-21700-P45B**

Performance Characteristics

Capacity	Typical	4500 mAh 16.2 Wh
	Minimum	4300 mAh 15.5 Wh
Cell Voltage	Nominal	3.6 V
	Charge	4.2 V
	Discharge	2.5 V
Charge Current	Standard	4.5 A
	Maximum	13.5 A (60°C cut-off)
Charge Time	Standard	1.5 hr
Discharge Current	Continuous	45 A (80°C cut-off)
Temperature	Charge	0°C to 60°C
	Discharge	-40°C to 60°C
Energy Density	Volumetric	643 Wh/l
	Gravimetric	242 Wh/kg
Typical Impedance	AC (30%SOC)	7 mΩ
	DC (50%SOC)	13 mΩ

Physical Characteristics

Shape	Cylindrical
Can	Steel
Diameter	21.55 mm (Max)
Height	70.15 mm (Max)
Weight	70 g (Typical)

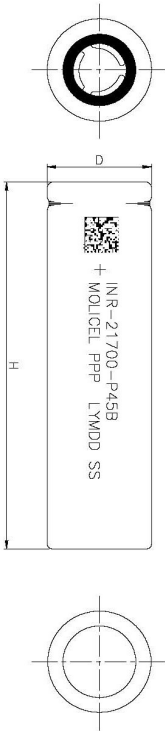




Charge / Discharge Characteristics




23°C Charge Characteristics

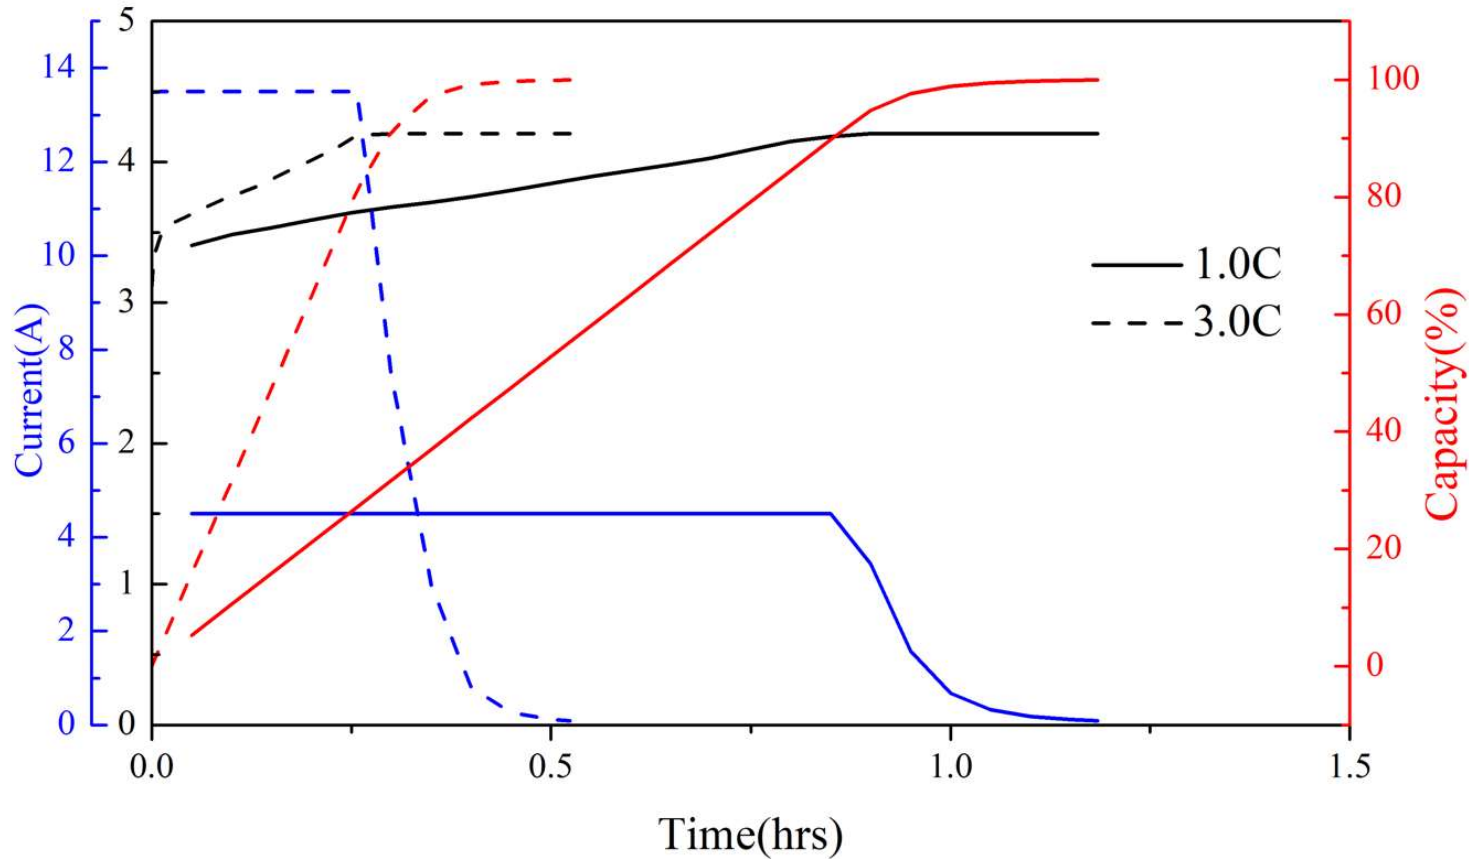

■ Cell is capable of 3C charge)




1A/10A Pulse DCR

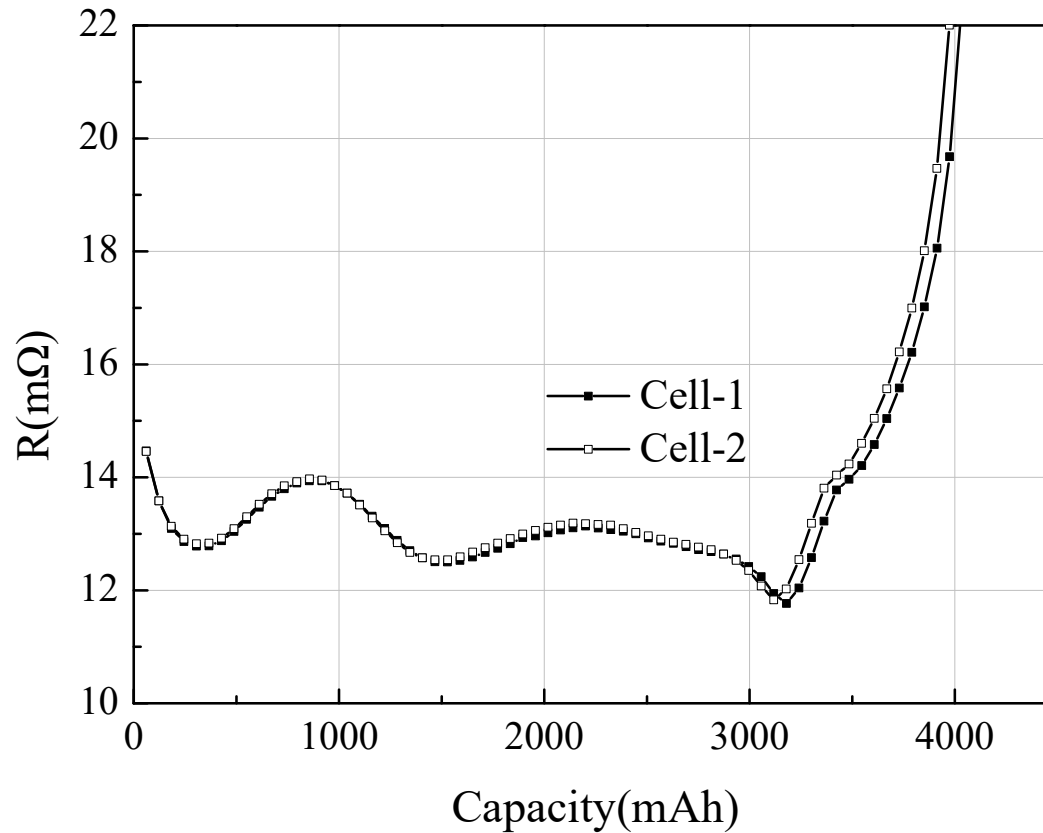

- Charge: CCCV 4.2A/4.2V (50mA current taper)
- Discharge: 1A/120s with 10A/10s pulses to 2.5V
- Ambient Temperature: 23 °C



Discharge Ratemap

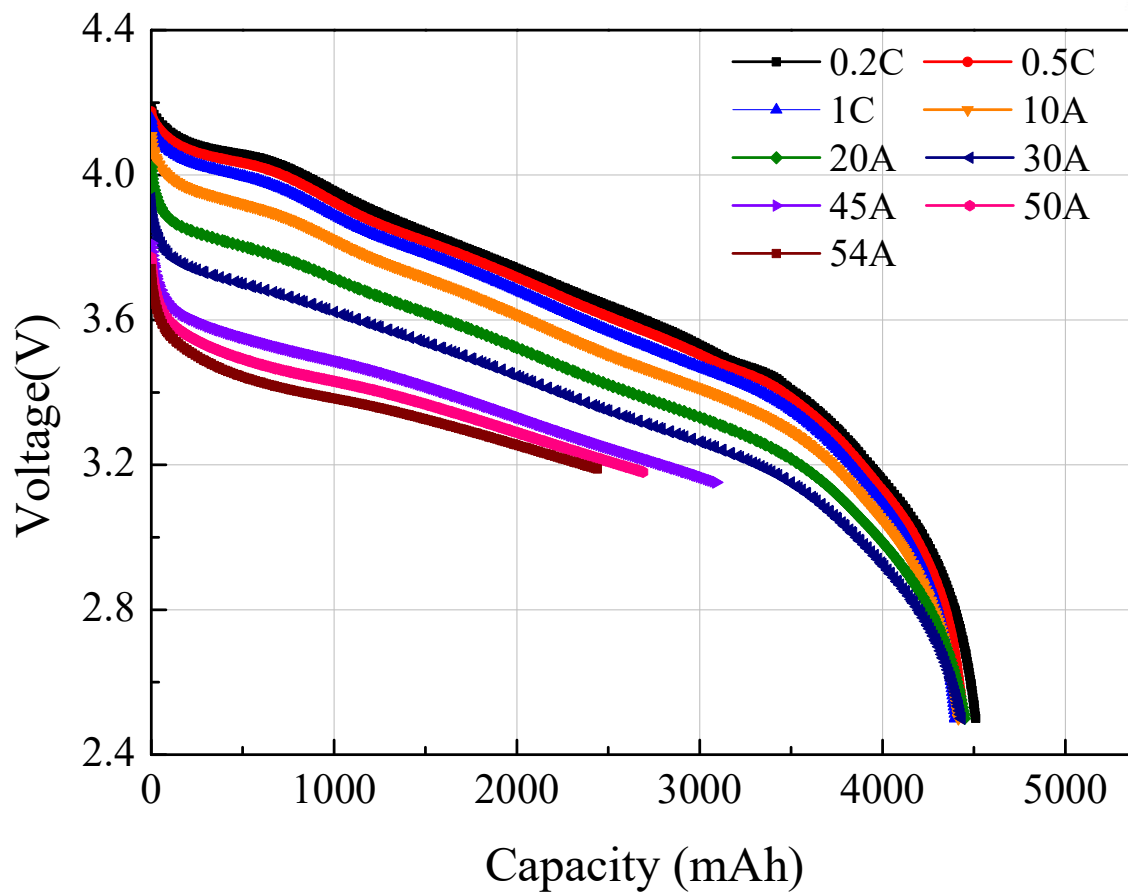


- Charge: CCCV 4.2A/4.2V (50mA current taper)
- Discharge: Constant Current to 2.5V
- Ambient Temperature: 23°C



Discharge Ratemap

MOLICEL®

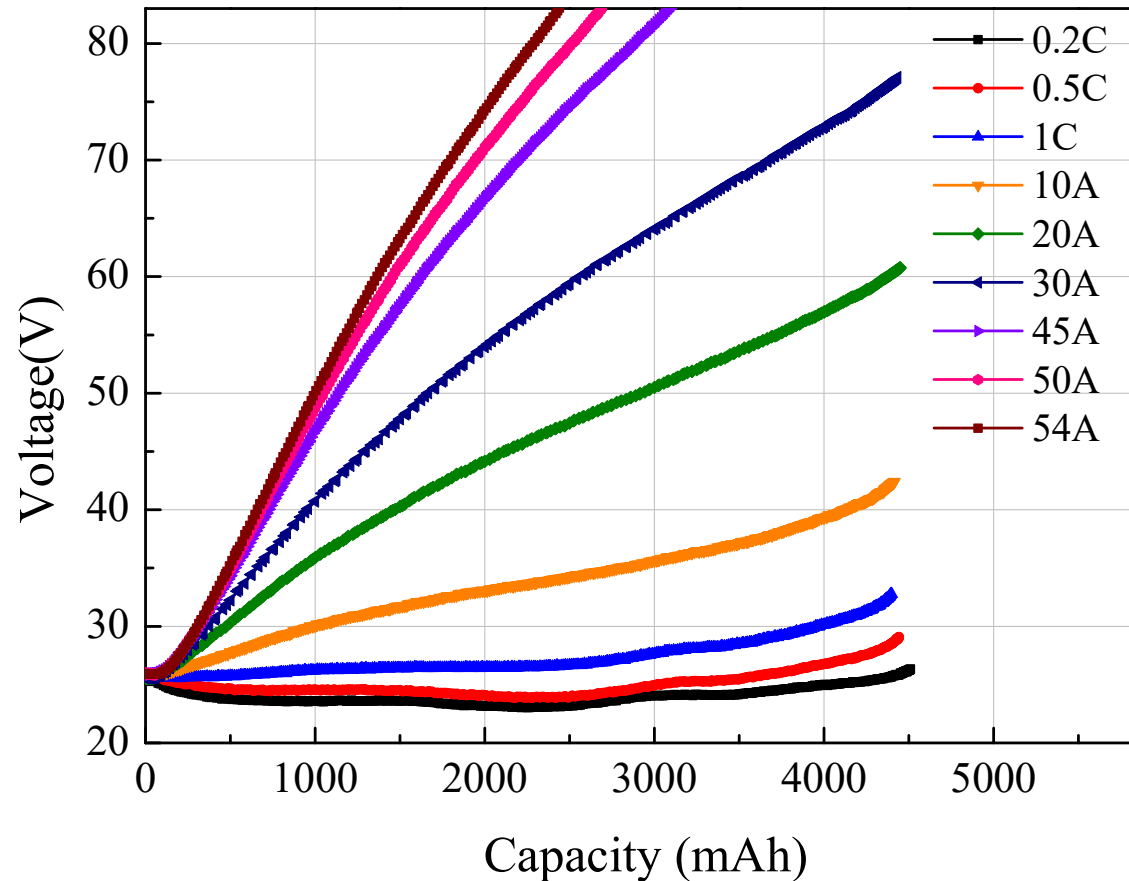

- Charge: CCCV 4.2A/4.2V (50mA current taper)
- Discharge: Constant Current to 2.5V
- Ambient Temperature: 23°C






Cycle Life




P45B 23°C, +1C/1C

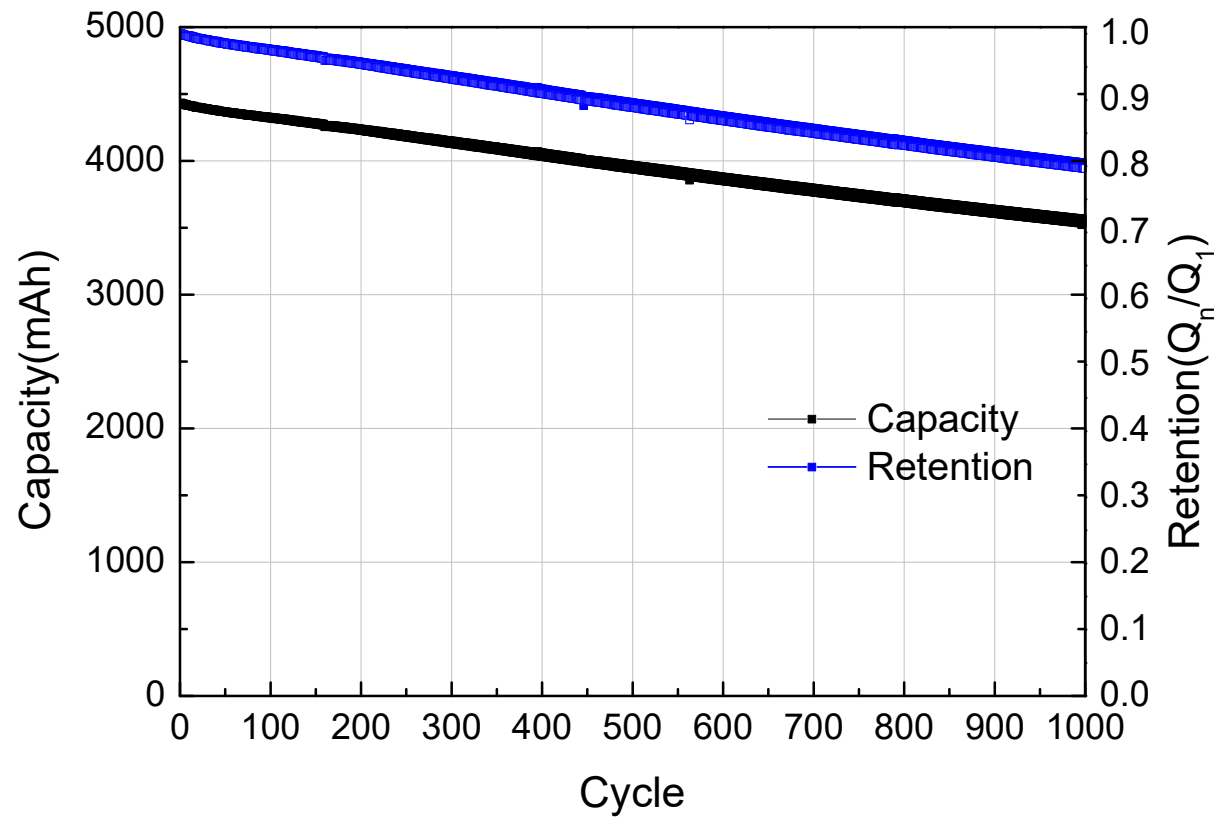


- Charge: CCCV 4.5A/4.2V (90mA current taper)
- Discharge: Constant Current at 4.5A to 2.5V
- Ambient Temperature: 23°C

P45B 23°C, +3C/1C

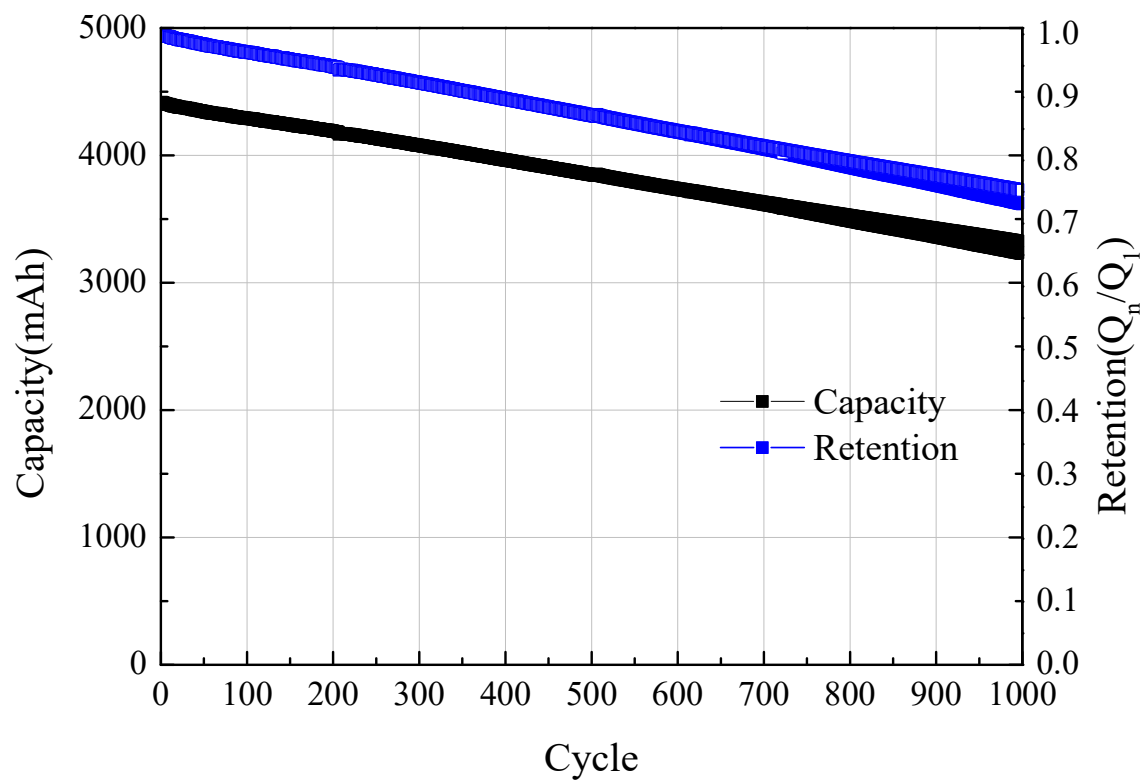


- Charge: CCCV 4.5A/4.2V (90mA current taper)
- Discharge: Constant Current at 13.5A to 2.5V
- Ambient Temperature: 23°C

P45B 23°C, +1C/-10A

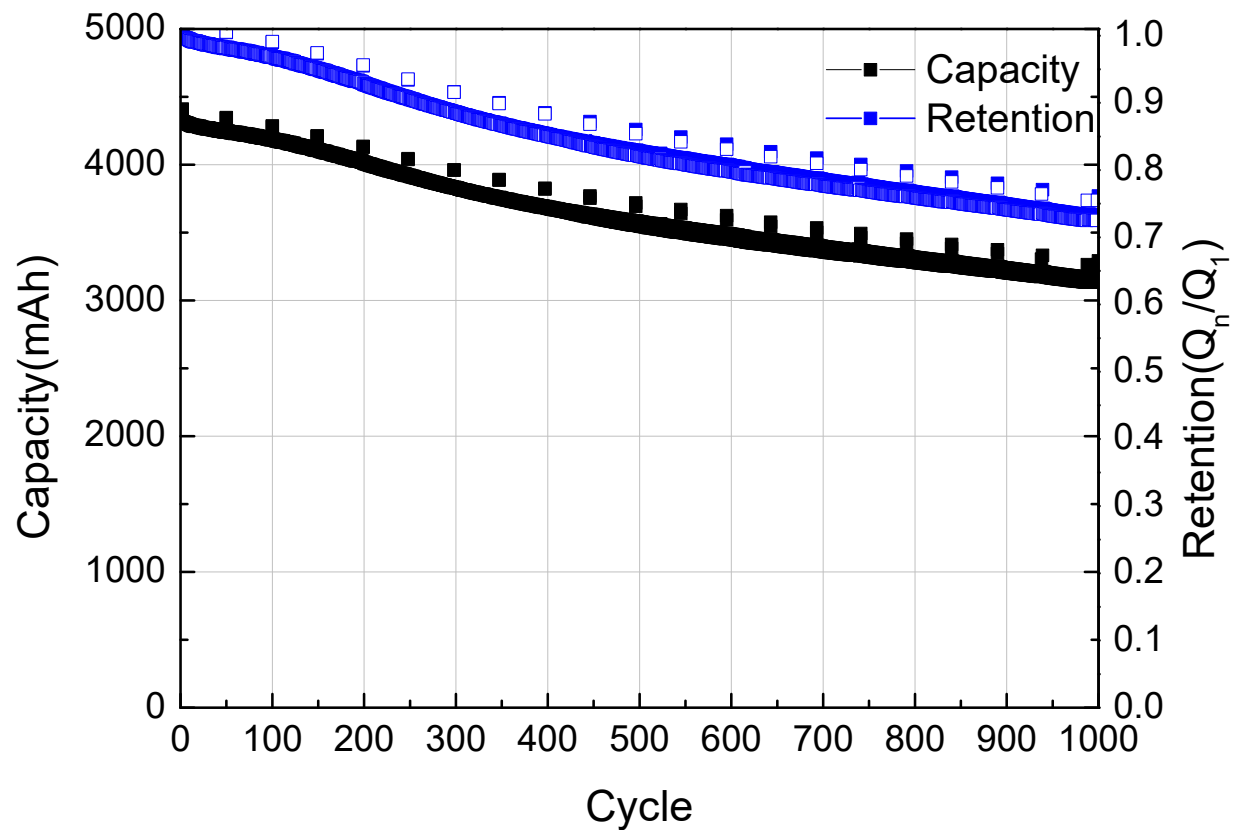

- Charge: CCCV 4.5A/4.2V (90mA current taper)
- Discharge: Constant Current at 10A to 2.5V
- Ambient Temperature: 23°C

P45B 23°C, +1C/-30A

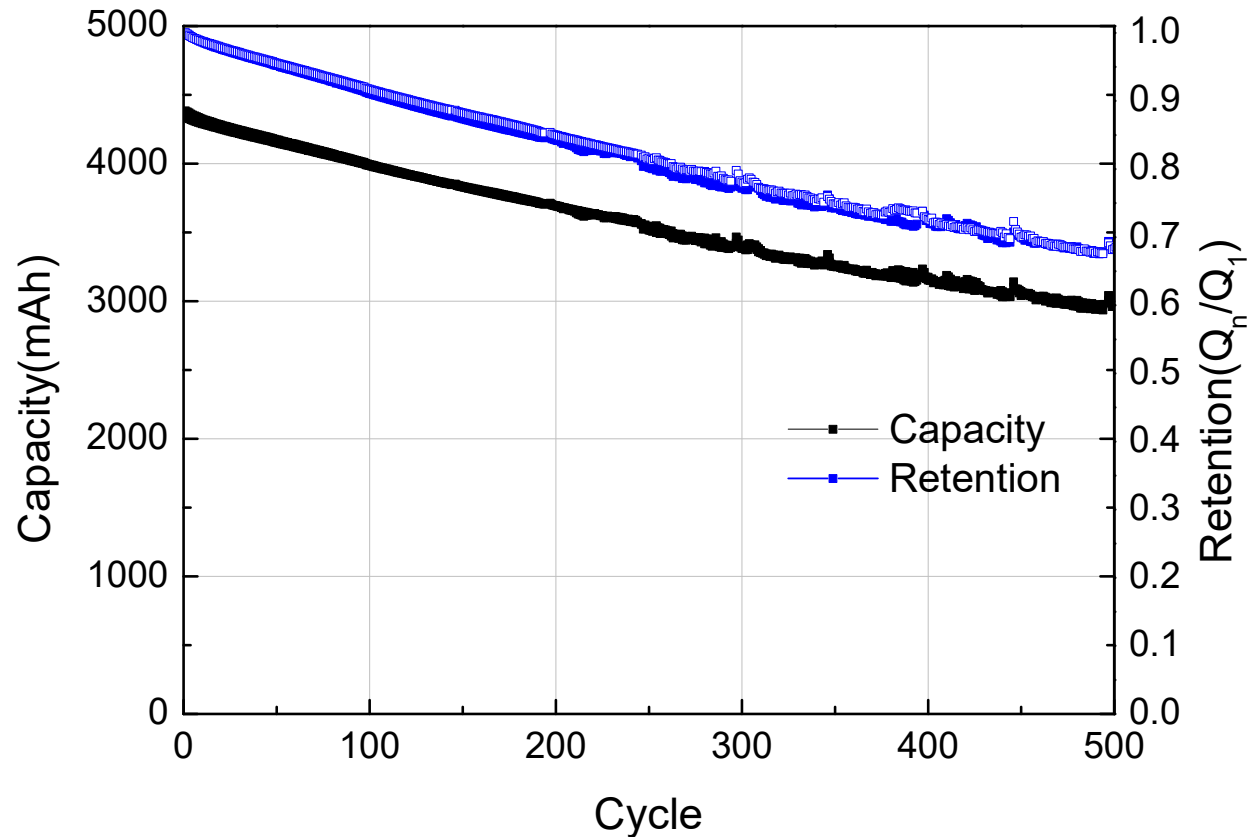


- Charge: CCCV 4.5A/4.2V (90mA current taper)
- Discharge: Constant Current at 30A to 2.5V
- Ambient Temperature: 23°C



Low Temperature Performance



P45B 8a Disch. Temperature Map

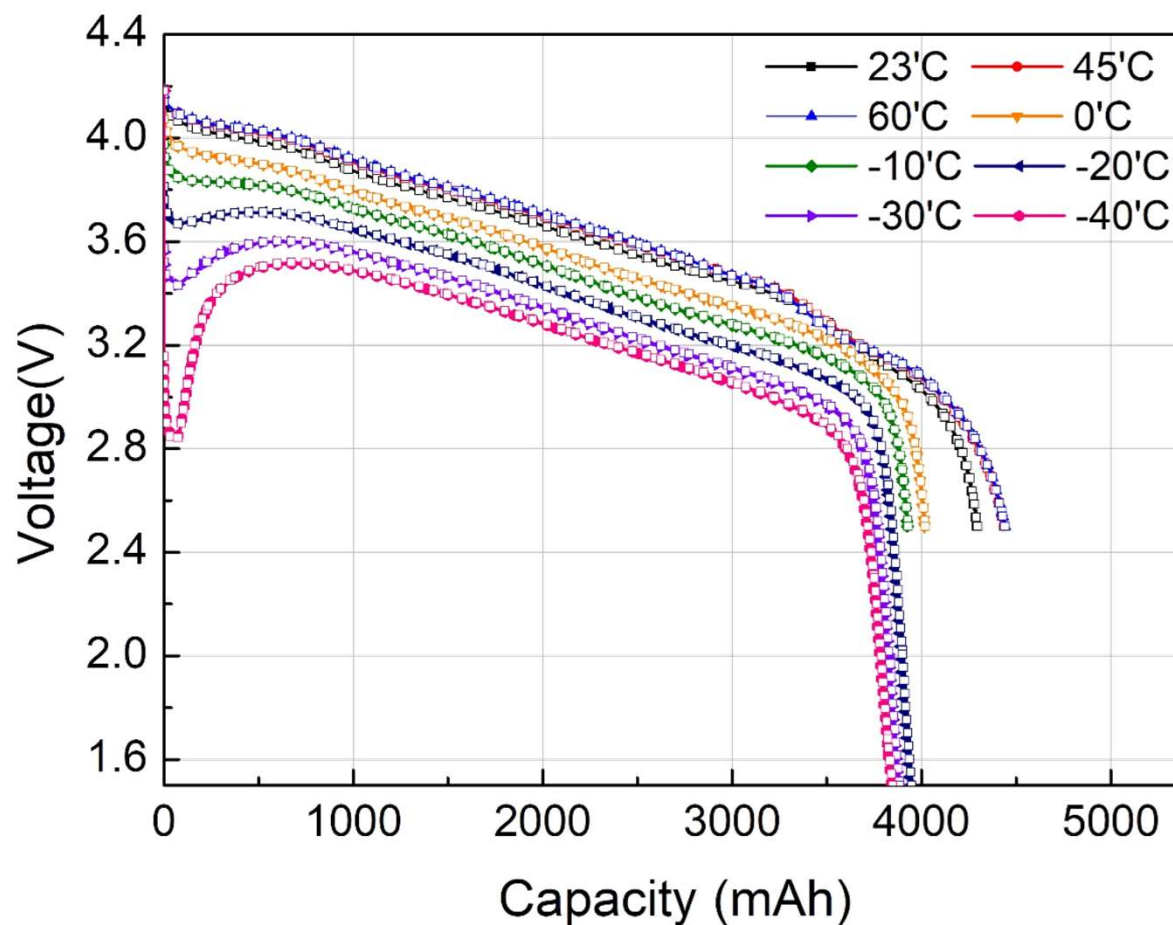

- Charge: CCCV 4.5A/4.2V (50mA current taper)
- Discharge: Constant Current at 4.5A to 2.5V
- Ambient Temperature: 60°C, 45°C, 23°C, 0°C, -10°C, -20°C, -30°C, and -40°C



Safety Data



Safety Data



Test	Condition	Result	Typical Max Temperature
Hotbox	4.2V, 130°C (UL)	Pass	130°C
Short Circuit	30 mΩ, 60°C	Pass	75°C
	15 mΩ, 60°C	Pass	90°C
	5 mΩ, 60°C	Pass	71°C
Overcharge	27A, 15 V, Insulated	Pass	120°C
Impact	4.2V, 23°C (UL)	Pass	28°C





Storage



100% SOC, 28 Day Storage



Design	Storage	Capacity		ACZ		
	Tempera ture	Retain ed	Recover ed	Before	After	Change
	°C	%	%	mΩ	mΩ	%
INR-21700- P45B	23	95	97	5.9	6	1.7%
	60	80	90	6.2	6.7	8.0%

- Typical values shown.





Taiwan

10 Dali 2nd Rd., Shan-Hwa,
Tainan County, Taiwan, R.O.C.

Tel: 886-6-505-0666

Fax: 886-6-505-0777

www.molicel.com



Canada

20000 Stewart Crescent
Maple Ridge, BC, CANADA,
V2X 9E7

Tel: 1-604-466-6654

Fax: 1-604-466-6600

molicel@molienergy.com

www.molienergy.com

Confidential 20





Thank you for your consideration.

